

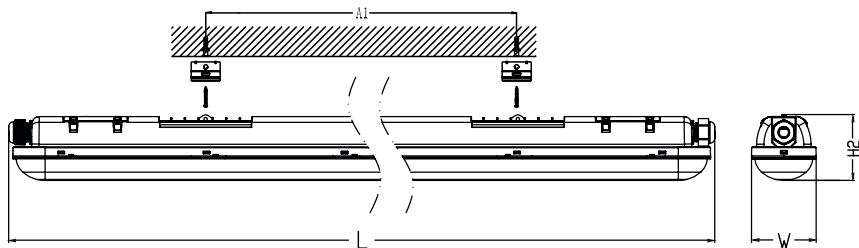

ECO CLASS DAMPPROOF


21W / 42W / 52W / 66W / 80W






MODEL	EAN	W	lm/W	LxWxH [mm]	IP	IK	⊖ (°C)	Vac Hz	
ECO CLASS DP 600 TH 21W 4000K IP65 GY	4058075463820	21	120	610 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	0,6 kg
ECO CLASS DP 600 TH 21W 6500K IP65 GY	4058075463844	21	120	610 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	0,6 kg
ECO CLASS DP 1200 TH 42W 4000K IP65 GY	4058075463868	42	120	1210 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	1,3 kg
ECO CLASS DP 1200 TH 42W 6500K IP65 GY	4058075463882	42	120	1210 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	1,3 kg
ECO CLASS DP 1500 TH 52W 4000K IP65 GY	4058075463905	52	120	1510 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	1,5 kg
ECO CLASS DP 1500 TH 52W 6500K IP65 GY	4058075463929	52	120	1510 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	1,5 kg
ECO CLASS DP HLO 1500 TH 66W 4000K IP65 GY	4058075464025	66	136	1510 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	1,7 kg
ECO CLASS DP HLO 1500 TH 66W 6500K IP65 GY	4058075464049	66	136	1510 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	1,7 kg
ECO CLASS DP HLO 1500 TH 80W 4000K IP65 GY	4058075464063	80	137	1510 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	1,7 kg
ECO CLASS DP HLO 1500 TH 80W 6500K IP65 GY	4058075464087	80	137	1510 x 70,5 x 70,4	65	08	-20°...+40°	220-240 V · 50/60 Hz	1,7 kg





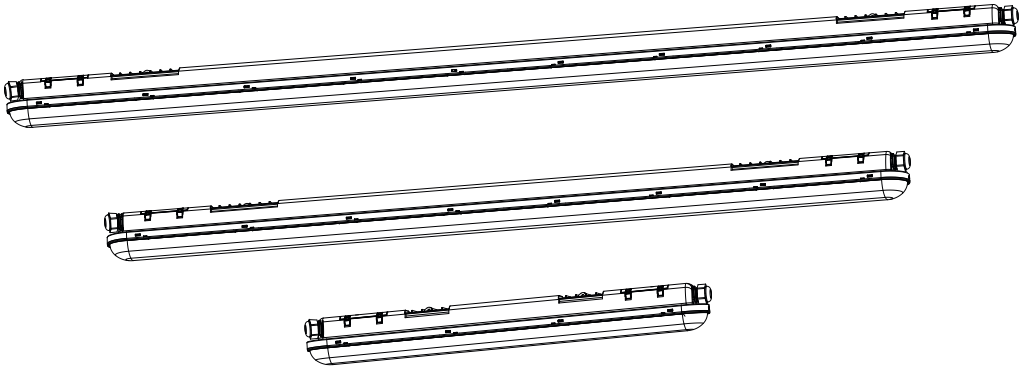


Model	L(mm)	W(mm)	A1(mm)	H2(mm)
ECO CLASS DP 600 TH 21W 4000K/6500K IP65 GY	610	70.5	230	70.4
ECO CLASS DP 1200 TH 42W 4000K/6500K IP65 GY	1210	70.5	780	70.4
ECO CLASS DP 1500 TH 52W 4000K/6500K IP65 GY	1510	70.5	1080	70.4
ECO CLASS DP HLO 1500 TH 66W 4000K/6500K IP65 GY	1510	70.5	1080	70.4
ECO CLASS DP HLO 1500 TH 80W 4000K/ 6500K IP65 GY	1510	70.5	1080	70.4



Model	n	B16	B10	C25	C16	C10
ECO CLASS DP 600 TH 21W 4000K/6500K IP65 GY	25	62	50	125	80	50
ECO CLASS DP 1200 TH 42W 4000K/6500K IP65 GY	20	37	30	75	48	30
ECO CLASS DP 1500 TH 52W 4000K/6500K IP65 GY	20	37	29	74	47	29
ECO CLASS DP HLO 1500 TH 66W 4000K/6500K IP65 GY	15	25	20	50	32	20
ECO CLASS DP HLO 1500 TH 80W 4000K/ 6500K IP65 GY	15	25	19	47	30	19

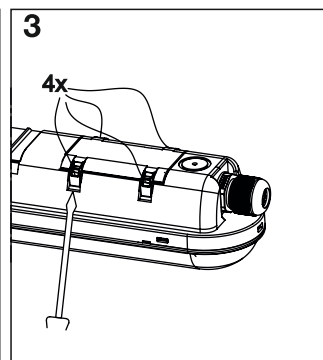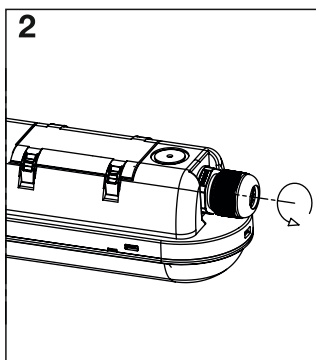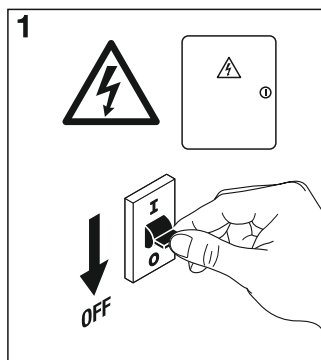

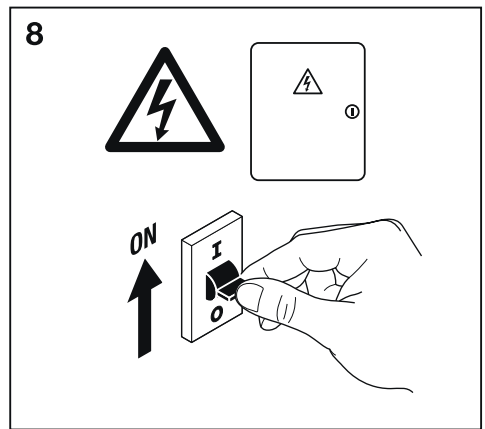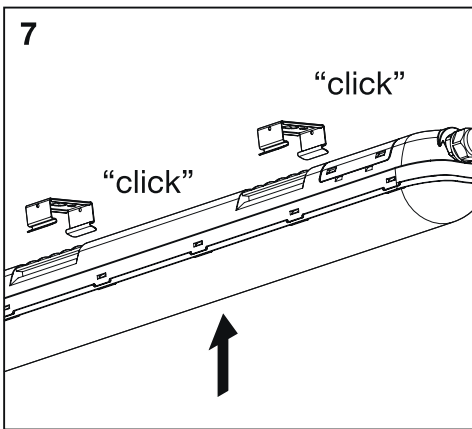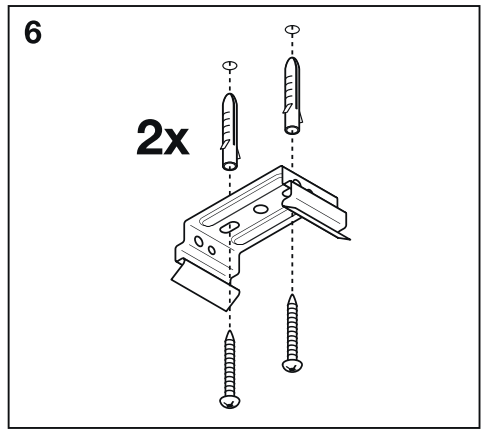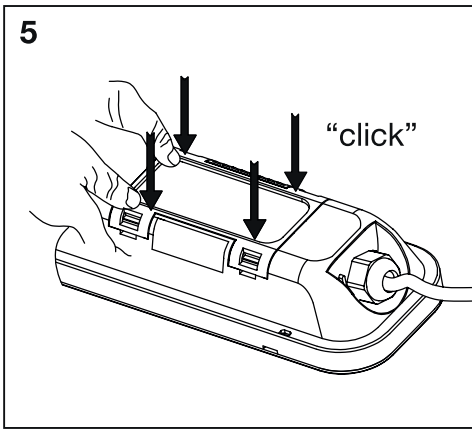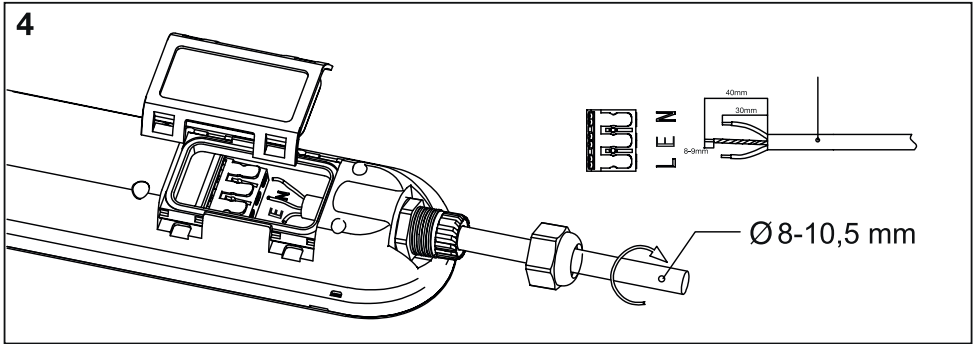

ECO CLASS DAMPPROOF 21W / 42W / 52W / 66W / 80W



CE **RoHS** **IP65 IK08**



C10449057
G11095543



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com